

# Omega Pacific



IT IS POSSIBLE



## It Is Possible...



Now, more than ever, tactical forces and security specialists have to rely on high-quality gear in order to protect and serve. Since 1982, we've designed and built our products here in the USA and we've been rising to meet new challenges in response to the needs of those fighting for freedom at home and abroad.

We're specialists in government sales so you can save time, money and get all your assault climbing hardware from one source. Trust us to deliver on time, to provide expert assistance and to maintain the highest-possible levels of quality and product integrity.

We've been working with climbers, rescuers, firefighters, industrial workers, police officers and troops for over twenty-two years. We take pride in our role in homeland security and in the fight for freedom around the world.




Omega Pacific is an ISO-9000 company and we build our products to the rigorous standards of CE, UL & NFPA. All our goods are rigorously tested and field-proven. Each and every carabiner, for instance is proof-loaded to half its rated strength before it leaves our plant.

So trust us to back you up on your next mission. We won't let you down.



## LINK CAM

- Camming ratio of 2.5:1 is greatest of any spring-loaded camming device available
- Speeds placements because the first piece chosen will probably fit perfectly
- Cam lobes are divided into three links to provide massive range
- Hybrid-material lobes made of 17-4 stainless steel and 7000-series aircraft aluminum for optimal strength-to-weight ratio
- Patent Pending

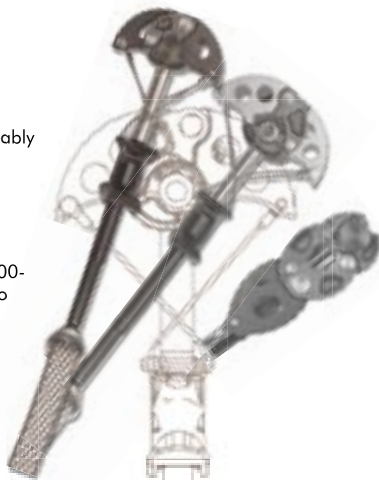


## TRI-NUTS

- Each nut fits three distinct sizes
- Mono-cable design provides great flexibility and low-profile for more secure placements
- Plated for low-reflectivity

## TACTICAL WEDGE

- Perfect placements in either straight-sided or curved cracks.
- Cut and machined from extruded aluminum alloy.
- Head anodized for low-reflectivity.

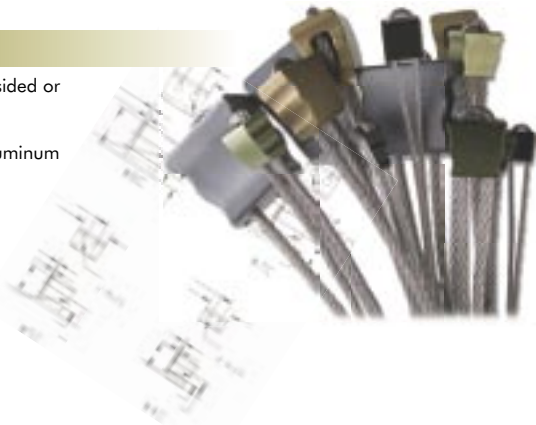


Part #	Description	Range	Strength	Weight gm/oz	Length mm/inch	Width mm/inch
OPTLC1	Link Cam #1	21.1mm - 53.3mm/.83" - 2.10"	14kN	176gm / 6.2oz.	171/6.75	63/2.48
OPTLC2	Link Cam #2	25.4mm - 64mm/.96" - 2.51"	14kN	207gm / 7.3oz.	191/7.51	63/2.48
OPTTRISETS	Tri-Nut Set size 0-8	7.49mm - 16.41mm	6kN - 10kN	249gm / 8.8oz.	call for details	call for details
OPTSCNUTSET	Scallop Nut Set size 1-13	3.68mm - 33.91mm	2kN - 10kN	439gm/15.5oz.	call for details	call for details

**WALL HAMMER**


- A Hefty 32 ounces for driving pins in with ease.
- Fiberglass shaft reduces vibration
- Ribbed rubber handle is easy to hold with plenty of surface contact for accuracy and power.
- Extended beak for tapping 'heads. Carbiner hole and the butt ring accommodate nearly any carabiner on the market.
- Available in non-reflective black.

**CARANUT TOOL**

- Removes stuck or fixed nuts and protection pieces
- Integral carabiner gate for easy racking
- Tough powder-coating in Non-Reflective Black

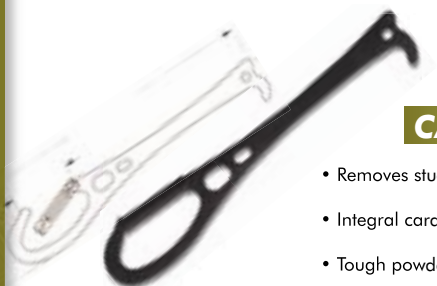**SBGII BELAY/RAP DEVICE**

- Climbers can go from full lock-off to feeding rope in single, smooth action—no jamming or hesitation at all
- Feed brake line through V-Slots or U-Grooves to adjust degree of friction to suit your particular need
- Use bottom or center clipping point for further friction adjustment
- Available in non-reflective black

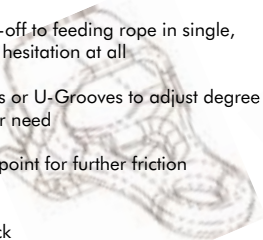**FIGURE 8 RAPPEL DEVICE**

- Smooth, consistent rope movement for repeatable and dependable rappels.
- Made from 7000 series Aluminum Alloy.
- Rated at 35kN (7,868 lbs)
- Available in non-reflective black



Part #	Description	Weight	Material	Length
OPTWHMRS	Tactical Wall Hammer	911gm / 32oz.	17-4 Stainless Steel Head/Fiberglass Shaft	33cm
CARANT	Caranut Tool	54gm / 1.9oz.	4130 CrMo Steel	21cm
OPTSBGII5	SBGII Belay/Rappel Device	77gm / 2.7oz.	Aluminum	
OPTFIG8-C	Figure 8 Rappel Device	114gm / .21oz.	Aluminum	

## MOUNTAIN AXE

- Aircraft-Quality Aluminum Handle stock
- NiCrMo, Tig-welded Head and Spike for strength and durability
  - All-purpose mountaineering axe
  - Available in non-reflective Stone

## ICE ANCHORS

- Aggressive lead tooth and exclusive thread design for fast, secure placements in all types of ice
- 4130 CrMo Body
- Exclusive plating process provides incredible corrosion resistance
- Hanger provides enough clearance to clip two carabiners
- Speed Grinder knob system for faster placements
- CE certified (17cm & 22cm)



## SNOW ANCHORS

- Extruded Aircraft-Quality Aluminum
- Durable non-reflective stone grey powder coated finish
- Anchor profile for greater holding power and durability
  - Available in 24-inch or 36-inch



Part #	Description	Materials	Weight	Length
OPTMAX	Winter Warfare Mountain Axe	4130 CrMo head/6000-series aluminum shaft	622gm - 707gm / 22oz. - 25oz.	65cm, 70cm, 75cm, 80cm
OPTISCR	Winter Warfare Ice Anchor	4130 CrMo tubing/plated steel hanger	111gm - 167gm / 4oz. - 6.1oz.	11cm, 17cm, 22cm
OPTSNANC	Winter Warfare Snow Anchor	6000-series extruded aluminum	526gm / 19oz., 774gm / 27.3oz.	24", 36"



## STYLE 3 STEEL

- 7/16" aircraft alloy steel barstock
- Great-handling carabiner for general use
- Zinc chromate plating resists corrosion
- Available in Screw-Lock and Quik-Lok
- Exceeds NFPA strength requirements
- 53kN (11,914 lbs) • Available in non-reflective black
- NSN #8465-01-322-7432 (bright version)



**STYLE 5**



**STYLE 7**



**STYLE 9**

## STYLE 5,7,9 STEEL

- 1/2" steel • Zinc chromate plating resists corrosion
- UL Classification G to NFPA 1983.01 standards
- Style 5, 72kN (16,185 lbs) • Style 7, 56kN (12,588 lbs)
- Style 9, 45kN (10,116 lbs) • Available in non-reflective black

## SCAFFOLD HOOK

- 9/16" aircraft alloy steel
- Zinc chromate plating resists corrosion
- UL Classification G to NFPA 1983.01 standards
- 41kN (9,216 lbs)
- Available in non-reflective black



## HMS JAKES

- The standard for HMS-style carabiners. Perfect for Muentner hitches, belay use and as master-carabiner at anchors
- Available with Screw gate, Quik-Lok or the 3-Stage Quik-Lok locking mechanisms
- Non-reflective, anodized finish: 5, C, B, FC & UC
- The Jake is also equipped with a unique side-swing gate to provide greater gate clearance and ease of use.

SKU	Description	Gate Opening	Major Axis	Gate Open	Minor Axis	Weight	Length	Width
OPT76S3SL	7/16" Style 3 Steel Screw-Lok	24mm / .95"	53kN	14kN	9kN	210gm / 7.4oz.	111.3mm / 4.4"	70.4mm / 2.8"
OPT76S3SQ	7/16" Style 3 Steel Quik-Lok	24mm / .95"	53kN	14kN	9kN	220gm / 7.7oz.	111.3mm / 4.4"	70.4mm / 2.8"
OPT12S5LNFA	1/2" Style 5 Steel Screw-Lok	27mm / 1.06"	72kN	22kN	12kN	283gm / 10oz.	124.5mm / 4.9"	70.6mm / 2.8"
OPT12S5LNFA	1/2" Style 5 Steel Screw-Lok	38mm / 1.42"	56kN	21kN	11kN	363gm / 12.8oz.	152.4mm / 6.0"	92.7mm / 3.7"
OPT12S5LNFA	1/2" Style 5 Steel Screw-Lok	50mm / 1.97"	45kN			171gm / 6.8oz.	171.4mm / 6.8"	95.3mm / 3.8"
OPTSH5LNFA	9/16" Scaffold Hook Steel Screw-Lok	52mm / 2.05"	41kN			658gm / 23.2oz.	223.3mm / 8.8"	116.8mm / 4.6"
OPTSH5QNFA	9/16" Scaffold Hook Steel Quik-Lok	54mm / 2.13"	41kN			678gm / 23.9oz.	223.3mm / 8.8"	116.8mm / 4.6"

## Color Guide



5 = NR Black



B = NR Sand



C = NR Stone



FC = Field Camo



UC = Urban Camo

## OVAL CARABINERS/D-FRAME CARABINERS

- Aircraft-Quality Aluminum.
- Available in Straight and Screw-Locking gate styles.
- CE certified (Ds and Locking Ds only)
- Available in non-reflective anodized finish: 5, C, B, FC & 6 (standard, bright finish)
- NSN #8465-01-322-7433  
Type III (bright finish)

## DOVAL WIREGATE

- Aircraft-Quality Aluminum.
- Easy to clip.
- Great for general-purpose
- CE certified
- 25kN (5,620 lbs)
- Available in non-reflective, anodized finish: 5, C, B, FC, & UC

## FIVE-O & FIVE-O QUICKDRAW

- Aircraft-Quality Aluminum
- Huge Gate clearances up to 32mm
- True radii (no flat spots) on all rope bearing surfaces
- Available in Wire and Screw-Locking gate styles
- CE certified
- 25kN (5,620 lbs)
- Available in non-reflective, anodized finish: 5, C, B, FC, & UC

- Also available in quickdraw format in Stone (color code C)  
carabiners and six-inch nylon sling (Stone)

SKU	Description	Gate Opening	Major Axis	Gate Open	Minor Axis	Weight	Length	Width
OPTHMS_L	Jake Screw-Lok	25mm / .98"	23kN	8kN	10kN	99gm / 3.5oz.	114.3mm / 4.5"	80.0mm / 3.2"
OPTHMS_Q	Jake Quik-Lok	24mm / .95"	23kN	8kN	10kN	105gm / 3.7oz.	114.3mm / 4.5"	80.0mm / 3.2"
OPTHMS_Q3	Jake 3-Stage Quik-Lok	23mm / .91"	23kN	8kN	10kN	106gm / 3.8oz.	114.3mm / 4.5"	80.0mm / 3.2"
OPTO	Oval	15mm / .59"	22kN	6kN	8kN	65gm / 2.3oz.	107.7mm / 4.2"	57.7mm / 2.3"
OPTO_L	Oval Screw-Lok	15mm / .59"	22kN	6kN	8kN	71gm / 2.5oz.	107.7mm / 4.2"	57.7mm / 2.3"
OPTD	D-Frame	20mm / .79"	31kN	9kN	9kN	65gm / 2.3oz.	108.7mm / 4.3"	60.7mm / 2.4"
OPTDL	D-Frame Screw-Lok	16mm / .630	31kN	9kN	9kN	74gm / 2.6oz.	108.7mm / 4.3"	60.7mm / 2.4"
OPTZN	Doval Wiregate	25mm / .98"	25kN	7kN	7kN	37gm / 1.3oz.	92.2mm / 3.7"	53.1mm / 2.1"
OPTFO_W	Five-O Wiregate	32mm / .95"	25kN	7kN	8kN	57gm / 2.0oz.	108.5mm / 4.3"	68.3mm / 2.7"
OPTFO_L	Five-O Screw-Lok	21mm / 1.4"	25kN	7kN	8kN	63mm / 2.2oz.	108.5mm / 4.3"	68.3mm / 2.7"

## Warning...

Omega Pacific climbing products are designed and tested specifically for climbing, mountaineering and technical rope work.

Omega Pacific steel carabiners are designed and tested specifically for fire, rescue, industrial safety and technical rope work. The user is responsible for following NFPA, OSHA, ANSI and all other applicable state and federal regulations regarding the use of these products.

All of these activities are inherently dangerous and present the risk of SERIOUS INJURY and/or DEATH.

The product information contained in catalogs and brochures is not a substitute for qualified, personal instruction. Any person using Omega Pacific products is responsible for obtaining qualified instruction on the proper use, techniques and limitations involved in such use.

Inspect all equipment before each use and destroy any gear that is damaged, worn or does not pass inspection. Any person using Omega Pacific products is responsible for the proper care and maintenance of these products.

**IMPROPER USE, ABUSE AND/OR LACK OF PROPER MAINTENANCE WILL INCREASE THE RISK OF SERIOUS INJURY OR DEATH.**

Any person using Omega Pacific products in any manner assumes all risks and accepts full responsibility for any damage or injury, including death, which may result from the use of any Omega Pacific product.

Any litigation involving this product will be in Washington State pursuant to Washington law.

The distributor/wholesaler/retailer is responsible for providing this warning information to the customer.

This warning must accompany all shipments/sales of Omega Pacific products.

## Thanks to...

Bruce Andre Photography, Spokane, WA

Action Printers,  
Cover d' Alene, ID

## Warranty...

WHEN IN DOUBT, REPLACE IT!

Omega Pacific products are warranted to the original retail purchaser to be free from defects in material and workmanship for a period of one (1) year and will be replaced without charge if, upon inspection by Omega Pacific, no misuse or alteration is disclosed. Omega Pacific makes no other warranty, expressed or implied.

It Is Possible



Omega Pacific

11427 West 21st Avenue • Airway Heights, Washington 99001 USA

800-360-3990 tel/509.456.0194 fax

info@omegapac.com/www.omegapac.com



MADE IN THE U.S.A.

Copyright 2005 All Rights Reserved.  
Reproduction by permission only.